


TOE
TRENCH 18"
OR 3
BLOCKS

SEED PRIOR TO
MAT INSTALLATION

WATER LEVEL

PARALLEL SEAMS HAVE A MINIMUM
OF 2' WIDE UNDERLAYMENT PLACED
EVENLY UNDER BOTH MATS & ANCHORS
INSTALLED EVERY 8'.

NOTE:
SHOREFLEX MAT SHOULD EXTEND
BELOW ESTIMATED SCOUR LINE

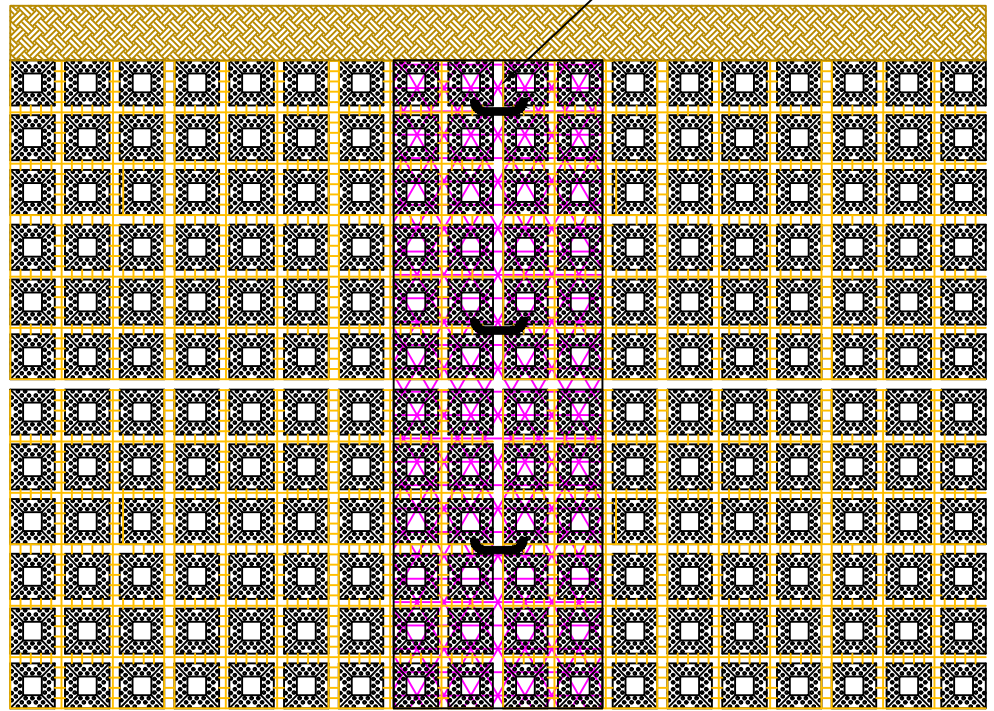

Drawing N.T.S.



Project:	
Customer:	
Detail Title:	ShoreFlex Wave Impact

DISCLAIMER
THE INFORMATION CONTAINED HEREIN HAS BEEN COMPILED BY SHORETEC® LLC AND TO THE BEST OF OUR KNOWLEDGE, ACCURATELY REPRESENTS THE SHOREFLEX® PRODUCT USE IN THE APPLICATIONS WHICH ARE ILLUSTRATED. FINAL DETERMINATION OF THE SUITABILITY FOR THE USE CONTEMPLATED AND ITS MANNER OF USE ARE THE SOLE RESPONSIBILITY OF THE USER. STRUCTURAL DESIGN AND ANALYSIS SHALL BE PERFORMED BY THE QUALIFIED ENGINEER.