



INSTALL AND TRENCH IN SHOREFLEX MAT PRIOR TO OUTLET INSTALLATION. SEAM OF ADJOINING MAT SHOULD BE 18" BEHIND OUTLET OPENING. THE 18" OR 3 BLOCK TRENCH SHOULD BE FILLED WITH 4000 PSI CONCRETE.

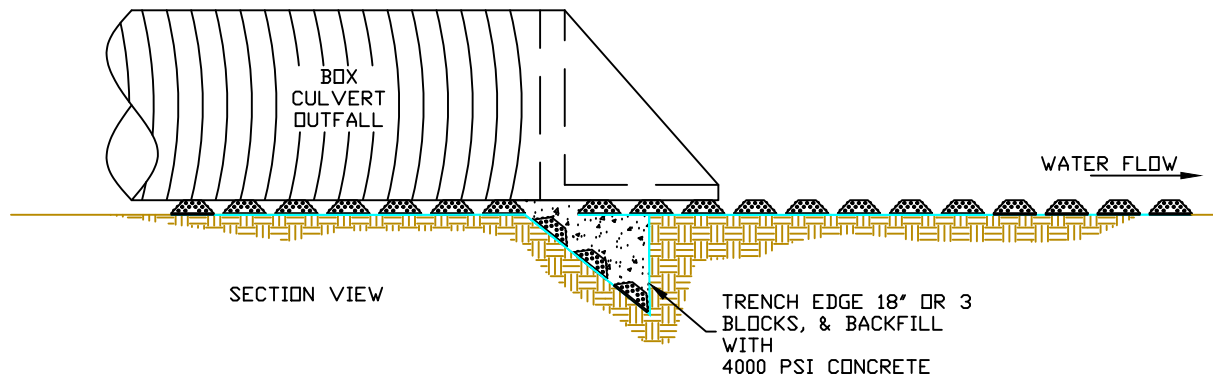

Drawing N.T.S.

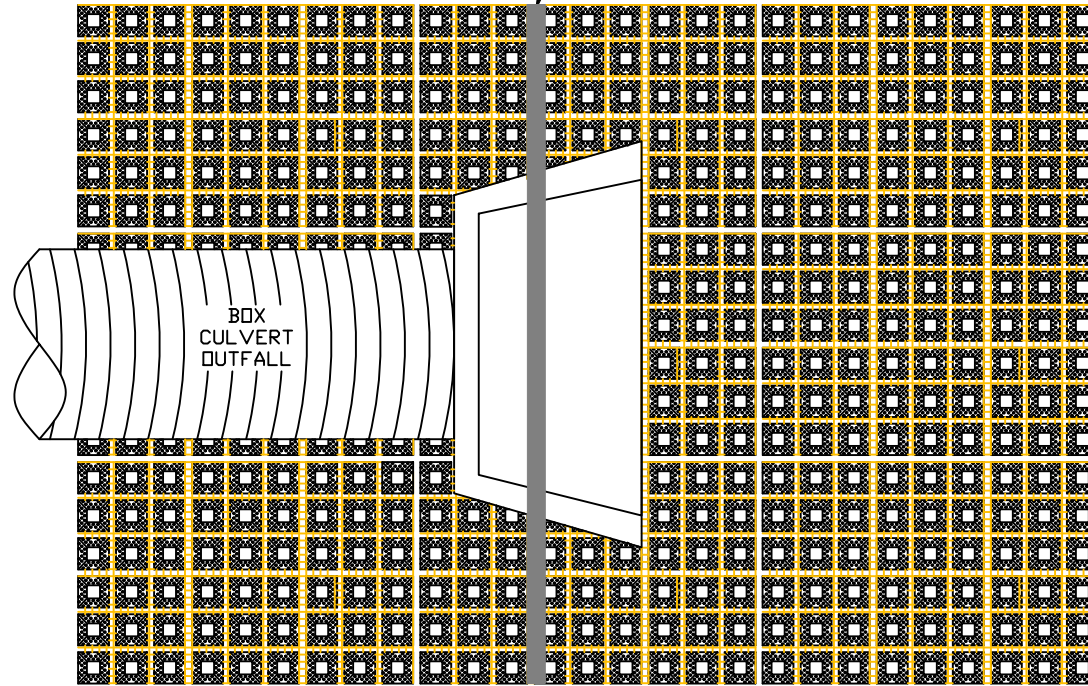

Project:	
Customer:	
Detail Title:	ShoreFlex New Outlet

DISCLAIMER
 THE INFORMATION CONTAINED HEREIN HAS BEEN COMPILED BY SHORETEC® LLC AND TO THE BEST OF OUR KNOWLEDGE, ACCURATELY REPRESENTS THE SHOREFLEX® PRODUCT USE IN THE APPLICATIONS WHICH ARE ILLUSTRATED. FINAL DETERMINATION OF THE SUITABILITY FOR THE USE CONTEMPLATED AND ITS MANNER OF USE ARE THE SOLE RESPONSIBILITY OF THE USER. STRUCTURAL DESIGN AND ANALYSIS SHALL BE PERFORMED BY THE QUALIFIED ENGINEER.